Dual Stepper Motor Controler Card
Joe Coffland and Mike Durller
October 2000

Vdd = 24v
MOSFET = IRL540
Dual 4 Bit DEMUX = DM74LS156M
Dual Opto Isolator = MCT62
Octal Buffer = 74F541PC
4 Bit Counter = DM74LS169

Notes:
- Clamping diodes on the outputs shouldn't be nessary, because of the MOSFET's internal schottky diodes.
- The coils should be able to draw up to 10 Amps with out a problem.
- Different Vdd values will require differnent output resistors

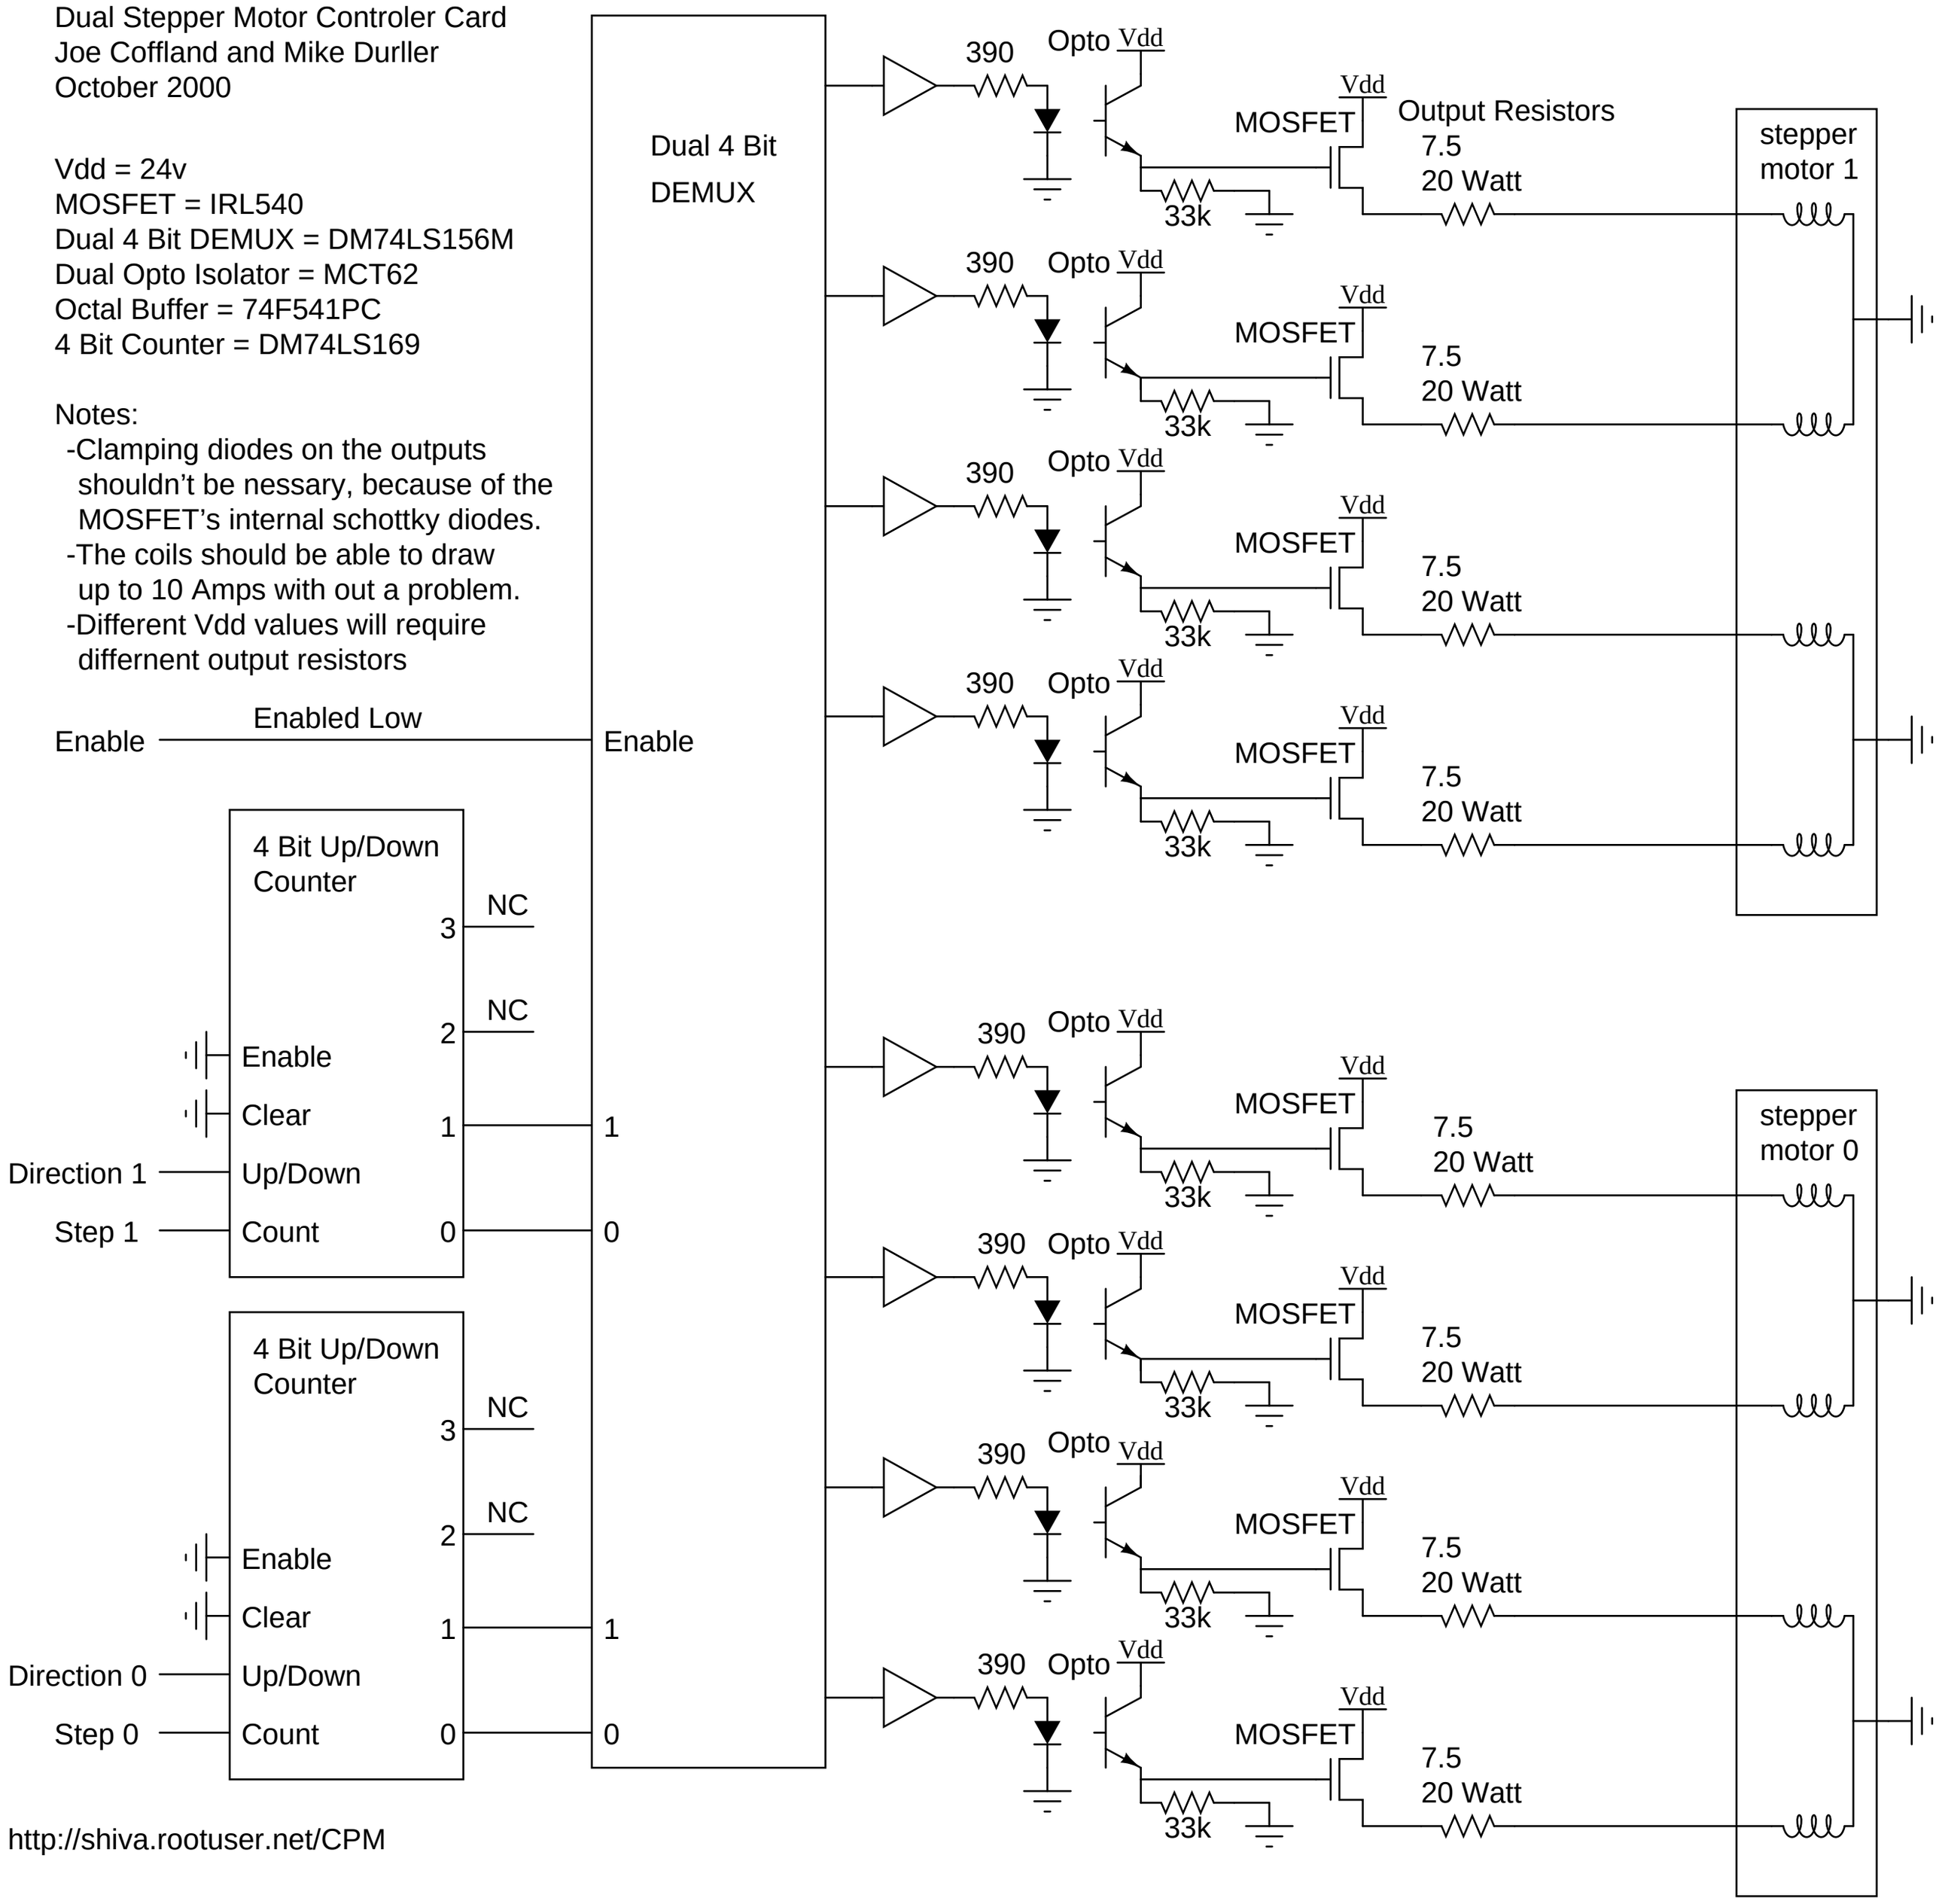

http://shiva.rootuser.net/CPM